Arktis Laser Product Datasheet

LSS-0639 Single-Longitudinal-Mode DPSS Laser System



Series Specifications:

Nominal Wavelength	639 nm
Output Type	CW
Laser Source Type	DPSS

Overview:

Specifications:

This spec sheet has been generated specifically for part number S6B-O, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to S6B-O have been highlighted below in **red + bold**.

Output Power (mW)	**<5**, **>50**, **>100**, **>150**, **>200**, **>250**, **>300**, **>350**, **>400**, **>500**, **>600**, **>800**
Output Power Stability (%RMS/4h)	**<1**, **<3**, **<5**
Central Wavelength (nm)	**639**
Wavelength Tolerance (+/- nm)	**1**
Divergence (mrad, full angle)	**<1.5**
Beam Dimensions (mm, $1/e^2$)	**1.5**
Warm-up Time (minutes)	**10**
Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz)	**<1**
Spectral Linewidth (nm)	**<0.0003**
M^2	**<1.2**
Polarization Ratio	**>100**
Coherence Length (m)	**>10**
Beam Pointing Stability (mrad)	**<0.05**
Operating Temperature Range (°C)	**15 to 35**
Total Power Consumption (W)	**22**
Max. Power Input Duty Cycle	**100%**
Standard Warranty (months)	**12**
MTTF (operational hours)	**10000**
Weight of Product or Laser Head (kg)	**2**
Beam Height from Base Plate (mm)	**27.4**
Dimensions of Product or Laser Head (mm)	**197 (l) x 70 (w) x 50 (h)**

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.
Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.


	Power Supply Type:	**SO**
FDA-Compliant Standard 	Input Power	**85v to 264v**
	Power Supply Weight (kg)	**2.3**
	Dimensions (mm)	**238 (l) x 146 (w) x 102 (h)**

*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


*Dimensions for fiber-integrated (I_) include laser head packaged inside.

Regulatory Classification:


The model you have selected (S6B-O) requires the following safety label(s):

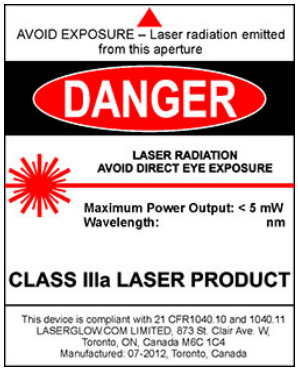



Dimensional Drawing - Laser Form Factor: O:

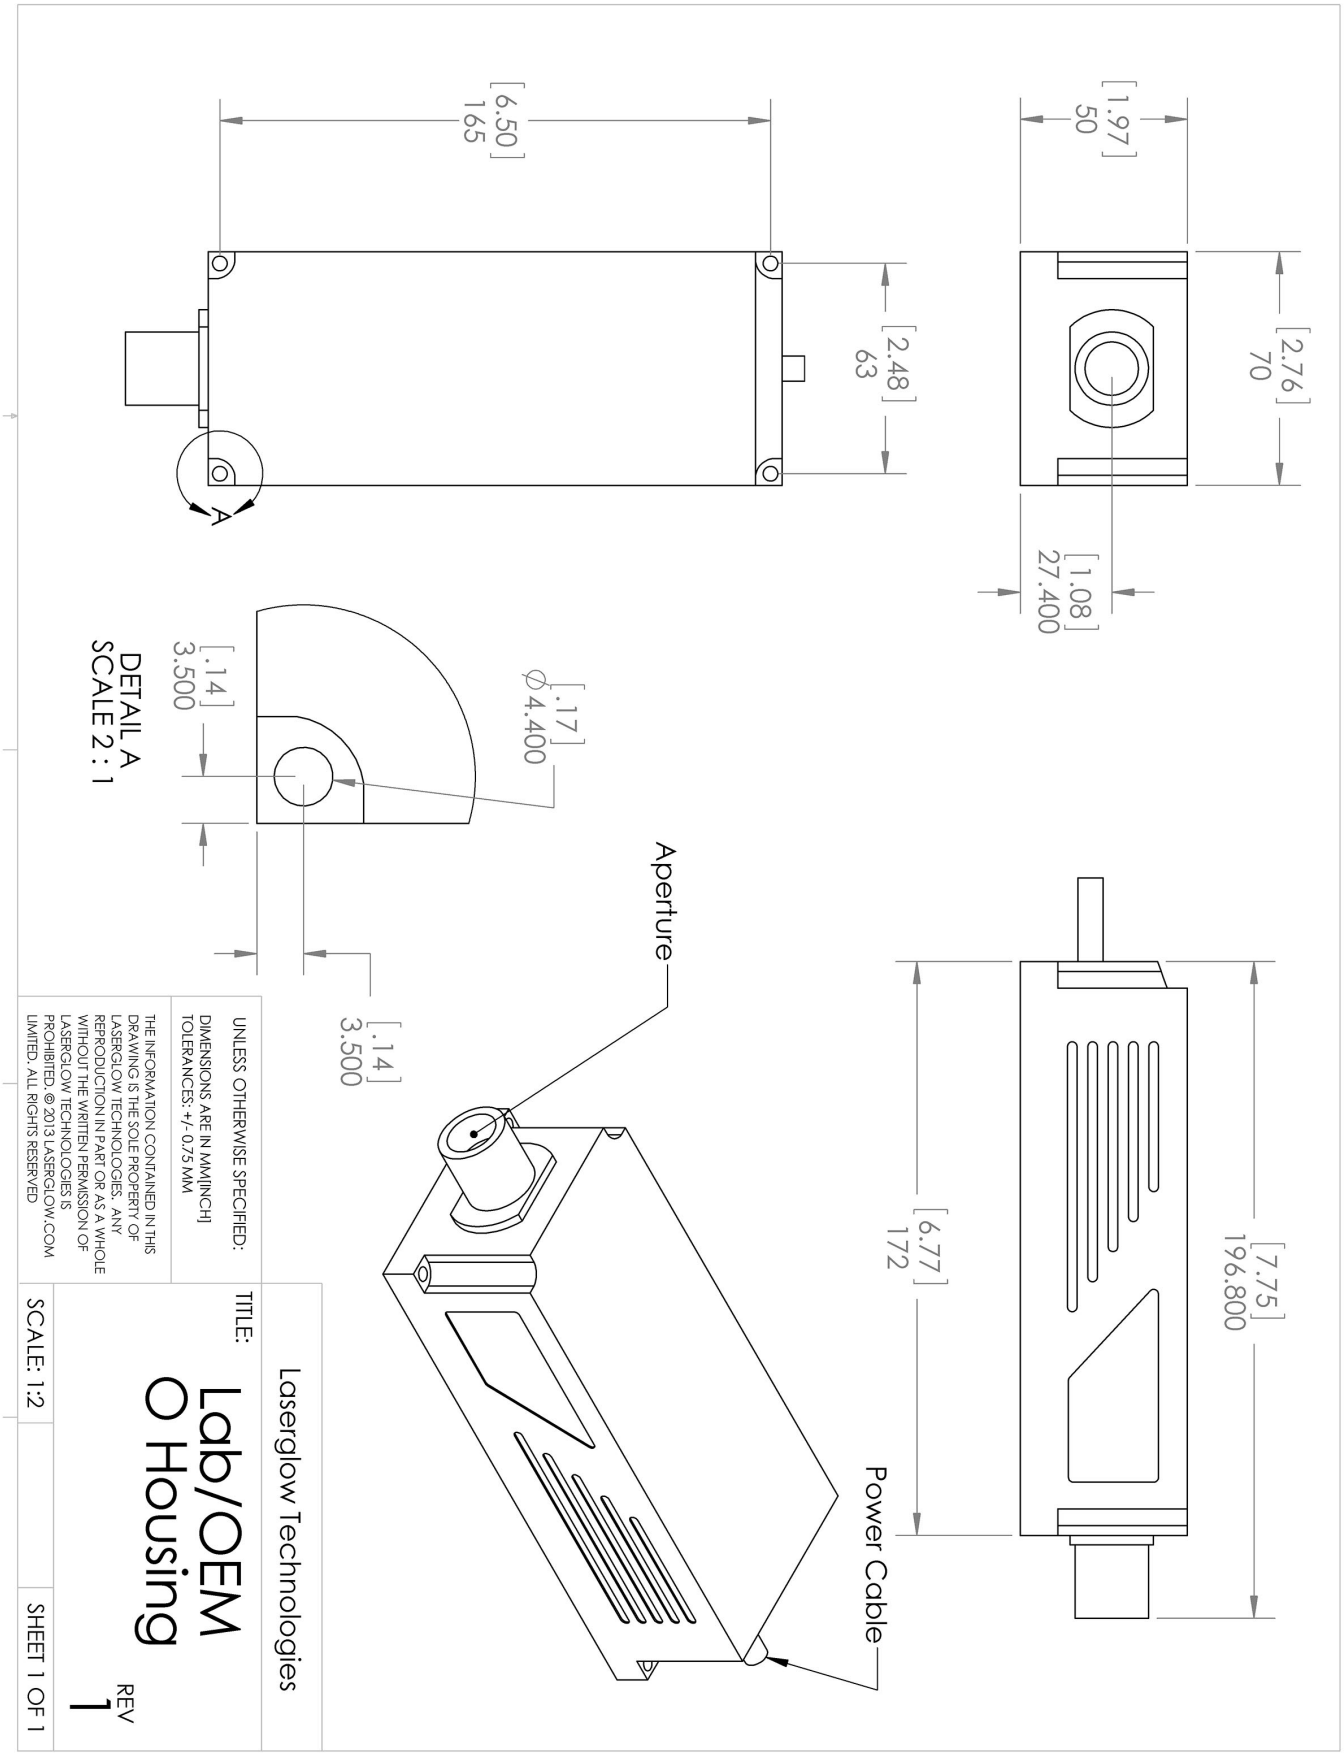


Dimensional Drawing - Power Supply Form Factor: SO:

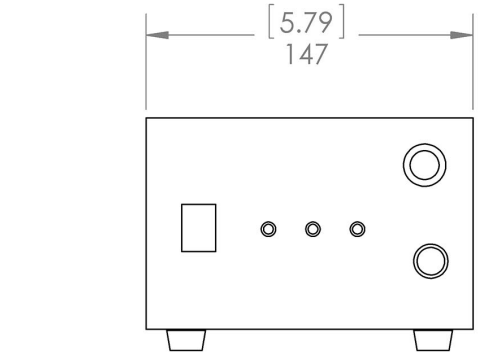

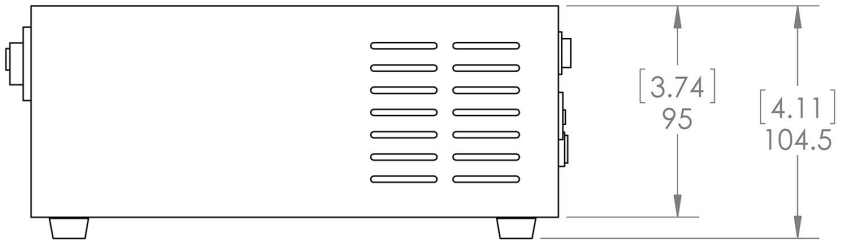

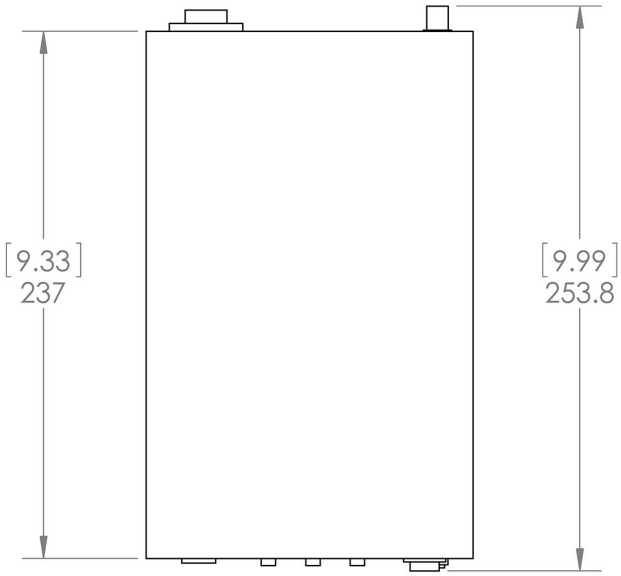

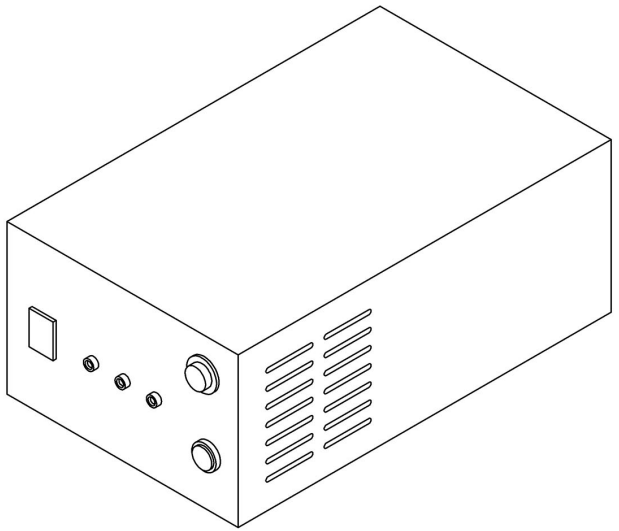

Laserglow Technologies

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM[INCH]
TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS PROHIBITED. © 2012 LASERGLOW.COM LIMITED. ALL RIGHTS RESERVED

TITLE:

Power Supply SA/SO/ST/SV

REV 1

SCALE: 1:3

SHEET 1 OF 1

Accessories:

The most popular accessories for model S6B-O are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

Part Number	Description	
 AGF6605XX	LSG-660-NF-5 Fit-Over Safety Goggles 660nm Output: OD 5+ at 600-694 nm CE Certified Full Details: www.arktislaser.com/AGF	
 ACSVISHXA	SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.arktislaser.com/ACS	
 ACFVISHXA	FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.arktislaser.com/ACF	
 AFF2002XX	Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length Full Details: www.arktislaser.com/AFF	
 AFS2002XX	Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length Full Details: www.arktislaser.com/AFS	
 ACALBHFXX	Carrying Case-103 Holds Lab/OEM H, F and O size Standard/LabSpec laser Full Details: www.arktislaser.com/ACA	Included With Laser

FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser
112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5
Tel. 1-416-886-1178 Fax 1-647-874-7129
sales@arktislaser.com www.arktislaser.com

E&OE: Data included in this sheet may be subject to change without notice.
Please confirm critical specifications with our staff prior to ordering.