

### **Arktis Laser Product Datasheet**

## Fiber-Integrated Laser System (Raman Spectroscopy)

# Image Coming Soon!

#### **Series Specifications:**

Nominal Wavelength	633 nm
Output Type	CW
Laser Source Type	Diode

Overview:

#### **Specifications:**

This spec sheet has been generated specifically for part number V62-I, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to V62-I have been highlighted below in red + bold.

Output Power (mW)	>50, >100, >200
Output Power Stability (%RMS/4h)	<1, <3
Central Wavelength (nm)	633
Wavelength Tolerance (+/- nm)	0.5
Spectral Linewidth (nm)	<0.1
Max. Analog Modulation Freq. (Hz)	30000
Max. TTL Modulation Freq. (Hz)	30000
Modulation Input Signal	0-5 VDC
Max. Power Input Duty Cycle	100%
Standard Warranty (months)	12
MTTF (operational hours)	10000
Weight of Product or Laser Head (kg)	5.4
Dimensions of Product or Laser Head (mm)	314 (l) x 290 (w) x 134 (h)

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

#### **Power Supply Options:**

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

	Power Supply Type:	II
Fiber-Integrated LabSpec	Input Power	85v to 264v
	Power Supply Weight (kg)	0
	Dimensions (mm)	0 (l) x 0 (w) x 0 (h)

<sup>\*</sup>Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


#### **Regulatory Classification:**

The model you have selected (V62-I) requires the following safety label(s):



<sup>\*</sup>Dimensions for fiber-integrated (I\_) include laser head packaged inside.

#### **Dimensional Drawing - Laser Form Factor: I:**

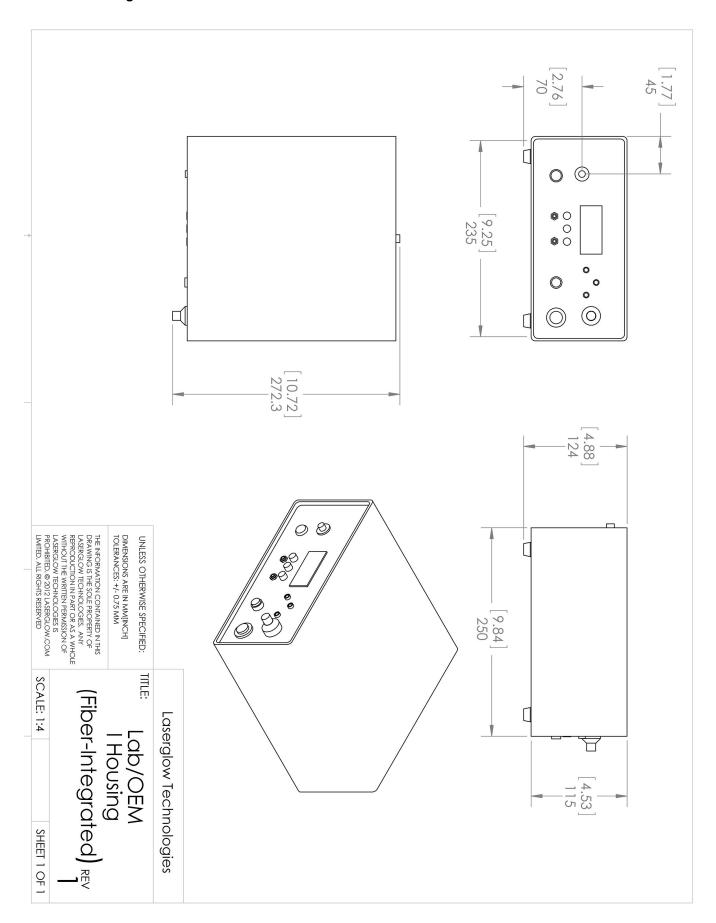

#### **Accessories:**

The most popular accessories for model V62-I are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

Part Number	Description	
-------------	-------------	--

#### FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser
112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5
Tel. 1-416-886-1178 Fax 1-647-874-7129
sales@arktislaser.com www.arktislaser.com

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.